

The **NOMAD POWER PRO 24 XL** is a lithium-based power pack that combines 3 functions :

- **Booster for 24 V vehicles (trucks, plants).**
- **Autonomous power supply for all kinds of electrical appliances.**
- **Emergency lamp.**

LITHIUM BATTERY BOOSTER

Its **lithium** battery ($LiCoO_2$) gives it an exceptional power-to-size ratio (starting current : 1400 A).

It starts vehicles equipped with a discharged 24 V battery (liquid, gel, AGM, Start&Stop) in a few seconds ( do not start Lithium $LiFePO_4$ batteries with this booster, battery voltages not compatible).

START	VEHICLE TYPES											
24 V PETROL & DIESEL												

SAFETY START

All safety features are integrated into the product to protect both the battery and the vehicle's electronic equipment:

- Anti-spark technology,
- Short circuit protection,
- Reverse polarity protection.
- Protection against excessive starting currents,
- Protection against booster temperature increases.

MOBILE ENERGY SOURCE

Its very powerful storage capacity (8 Ah) brings comfort and tranquility to the daily need to stay connected (phone, tablet, computer).

Equipped with:

- **2 USB ports 5 V - 2.1 A** and **1 USB-C port 5 V - 3 A** for charging smartphones, tablets, GPS devices, etc.

HIGH BRIGHTNESS ASSIST LAMP

Auxiliary light (28 leds) with 3 lighting modes: normal, strobe, SOS.


LCD DISPLAY

The NOMAD POWER PRO 24 XL is equipped with an LCD display that gives information on:

- the % of charge of the internal battery.
- the different input and output ports used.



Colour LCD display

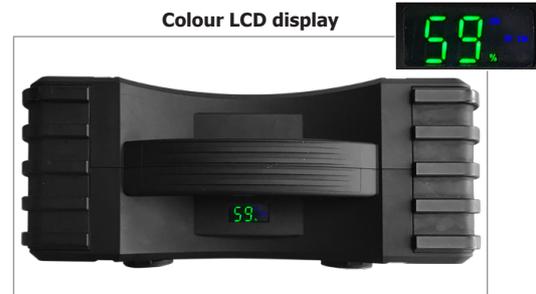

Supplied with accessories:



Charger 230 Vac / 18 Vdc



Strap



Cigarette lighter charger



3 in 1 cable



USB Type-C cable

STARTING				EQUIPMENT				INPUT / OUTPUT				POWER BANK	LED	DIMENSIONS				
Lithium		I			SMART CABLE			CABLES			INPUT	OUTPUT						
Capacity per cell	Full charge	Start	Cranking CC	Peak Battery			USB-C	MICRO USB Type B	Lightning	12V		15V						
8 Ah 236.8 Wh	10 h	1400 A	2400 A	3000 A	—	✓	✓	✓	✓	✓	18V - 2A	2 5V - 2.1	—	—	✓	3 modes : Light SOS SPOT	27.8 x 11 x 27.4	5.6
												1 Type C 5V - 3A						